

# GB8011

GPU-optimized Box to Tackle  
Increasingly Complex AI Challenges



## A Powerful, Accelerated GPU Box

The GPU platform packs 16 high-performing computing engines, NVIDIA GPUs, all connected via NVLink 3.0 technology, into one powerful GPU box. This delivers unparalleled AI acceleration, and achieves extremely fast GPU-to-GPU interconnects than traditional PCIe-based solution.

## Application


- Hexagon icon: Hyperscale Data Center
- Hexagon icon: High Performance Computing
- Hexagon icon: AI and Machine Learning

## Innovative Disaggregated Approach

The GPU box can be directly connected to one or two CPU head node server(s) to integrate as a unified AI solution. This disaggregated GPU and CPU approach increases the flexibility of choosing different CPU head node servers of your own to satisfy specific workloads, and each CPU and GPU component can be scaled independently as demand grows.

## Optimal Networking Performance

The PCIe Gen4-enabled GPU accelerator supports up to 16 high-bandwidth network interface cards, which allows for high-speed data movement without bottleneck and achieves faster and better time to results for business insight.

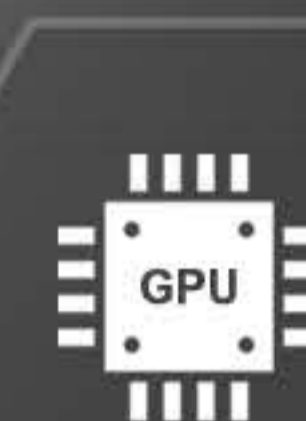

Up to 16 GPUs



AI/HPC Applications



Up to 16 PCIe  
Gen4 x16 Cards



4+4 Redundancy,  
Titanium Efficiency



8U Rackmount

# GB8011


## Specifications



North America: +1 408-727-8060



Email: [Sales@ingrasys.com](mailto:Sales@ingrasys.com)

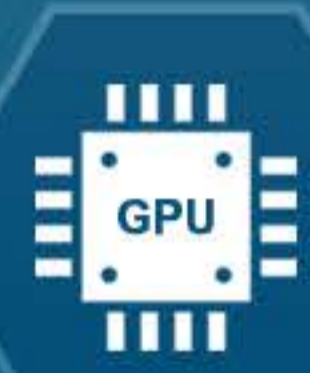

### Supported GPU

16 x Nvidia SXM4 A100



### Expansion Slots

16 x PCIe Gen4 x16 Slots  
(8 x PCIe Slots per 3U GPU Sled)



### Storage

8 x U.2 NVMe SSDs  
(4 x U.2 NVMe SSDs per 3U GPU Sled)



### Front Panel

#### 3U GPU Sled

1 x Power LED, 1 x UID LED, 1 x Attention LED,  
4 x zCD Connectors

#### 2U Power Shelf

1 x Power LED, 1 x UID LED, 1 x Attention LED,  
1 x RJ45 port for 1GbE Ethernet



### Form Factor

8U Rackmount  
(2 x 3U GPU Sled with 2U Power Shelf)



### Chassis Dimensions (H x W x D)

13.8" x 17.5" x 37.3" /  
352.5mm x 447.0mm x 948.1mm



### AC Input

180Vac ~ 264Vac,  
50-60Hz



### Management

1 x ASPEED AST2520



### PSUs

4+4 Redundant 3000W Power Supplies  
(Titanium Efficiency)



### Fans

24 x 60\*56mm for N+1 Cooling  
Redundancy



### Certification

CE/FCC/RCM/BSMI/UL/  
IECEE CB



#### Operating Temperature

10°C to 35°C (50°F to 95°F)

#### Non-operating Temperature

-40°C to 60°C (-40°F to 140°F)

#### Operating Relative Humidity

8% to 85%RH

#### Non-operating Relative Humidity

5% to 95%RH



The information in this document is subject to change without notice. Ingrasys, the Ingrasys logo are trademarks or registered trademarks of Ingrasys Technology Inc. All logos, trademarks and registered trademarks are the property of their respective owners.

© 2021 Ingrasys Technology Inc. All rights reserved.